

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



- Powerful – 650 m<sup>3</sup>/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

<b>Construction type</b>	
Wall mounted cooker hood	•
<b>Construction type and design</b>	
Appliance colour	Stainless steel
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
<b>Design</b>	
Possible in RAL colour (specify colour code when ordering)	•
<b>User convenience</b>	
Electronic controls	•
Controls	Light-touch switches with LEDs
Power levels (number without Booster level)	3
Booster levels	1
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	49.7
Energy efficiency class (A+++ – D)	A
Grease filtering efficiency class	A
Fluid dynamic efficiency class	A
Lighting efficiency class	A
<b>Cleaning and care</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
<b>Lighting</b>	
Number x W	3 x 3 W
Light intensity in lx	450 lx
Colour temperature in K	3000 Kelvin
<b>Fan</b>	
Dual-action blower	•
AC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	265
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	320
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	395
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	650
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	67.0

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	52.0
--	------

### Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	190
--	-----

Air throughput in Level 2 (m³/h) according to EN 61591	270
--	-----

Air throughput in Intensive level (m³/h) according to EN 61591	460
--	-----

Air throughput in Level 3 (m³/h) according to EN 61591	330
--	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	60.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
---	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	45.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
--	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
--	------

### Safety

Safety switch-off	•
-------------------	---

### Technical data

Overall hood height for extraction mode and external in mm	685–1005
--	----------

Overall height for recirculation mode cooker hoods in mm	815–1135
--	----------

Canopy width in mm	898
--------------------	-----

Overall height for vented and external in in. (mm)	685
--	-----

Overall height for extraction mode and external mode cooker hoods in mm	1005
---	------

Canopy height in mm	62
---------------------	----

Overall height for recirculation in in. (mm)	815
--	-----

Canopy depth in mm	500
--------------------	-----

Overall height for recirculation mode cooker hoods in mm	1135
--	------

Net weight in kg	25.0
------------------	------

Length of supply lead in m	1.5
----------------------------	-----

Standard plug fitted	•
----------------------	---

Minimum height above electric hobs in mm	450
--	-----

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
--	-----

Number of phases	1
------------------	---

Total rated load in kW	0.22
------------------------	------

PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting



EAN: 4002515752791 / Material number: 10434520 /  
Old Material Number: 28419854GB

Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

#### Installation notes

Extraction ducting connection at top	•
Extraction ducting connection at rear	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•

#### Accessories included

Non-return flap	•
-----------------	---


#### Optional accessories

Active charcoal filter, can be reactivated	DKF 12-R
--	----------

## PUR 98 W

Wall mounted cooker hood

with EasySwitch light-touch switches for convenient operation and LED lighting

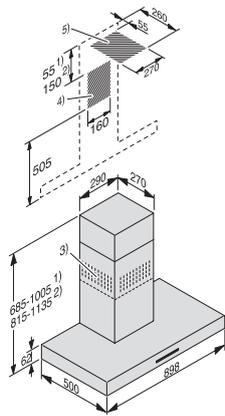

PUR92W Living, PUR98W, DA419-6, DA419-7 (Installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation)