

CS 7101-1 FL
SmartLine element
with a dual wok burner



- Simple controls -single-handed operation via rotary dial control
- Elegant design – for flush or raised installation
- Seamlessly integrates with any SmartLine element
- Broad performance spectrum – dual wok with up to 4.500 kW kW of power
- Easy cleaning – dishwasher-safe ComfortClean pot rests

EAN: 4002516306245 / Material number: 11402720 / Old Material Number: 27710151GB

Heating type	
Heating type	Gas
Construction type	
SmartLine	•
Design	
Elegant glass ceramic surface	•
Flush	•
Surface-mounted/flush-fit	–/•
Ceramic surface colour	Black
Cast iron pot rests (matt black enamelled)	•
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	1
Gas burner power rating	
Dual wok burner in kW	4.50
1st cooking zone/cooking area	
Position	Centred
Type	Dual wok burner
Size in mm	Ø 300
Max. rating in W	4500
User convenience	
Operation via sensor controls	Knob
Operation via knobs	•
Electronic ignition with single-hand operation	•
Cleaning and care	
Easy to clean ceramic glass	•
Dishwasher-proof pot rests	•
Safety	
GasStop	•
Technical data	
Dimensions (H x W x D) in mm	92 x 378 x 520
Dimensions in mm (width)	378
Dimensions in mm (height)	92
Dimensions in mm (depth)	520
Cut-out dimensions (W x D) with flush-fit installation in mm	358/382 x 500/524
Cutout dimensions in mm (width) with surface-mounted installation	358 mm
Cutout dimensions in mm (depth) with surface-mounted installation	500 mm
Casing height incl. connection box in mm	92
Internal cutout dimensions in mm (width) with flush installation	358
Internal cutout dimensions in mm (depth) with flush installation	500
Weight in kg	7
External cutout dimensions in mm (width) with flush installation	382


CS 7101-1 FL
SmartLine element
with a dual wok burner



EAN: 4002516306245 / Material number: 11402720 / Old Material Number: 27710151GB

External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	4.50
Length of supply lead in m	1.4
Position of gas connection	Hinten links
Voltage in V	220-240
Frequency in Hz	50-60
Accessories included	
CSFG 7000 FlameGuard	•
Mains cable	Yes
Jets for natural gas	•
Jets for liquid gas	•
Wok ring	•

CS 7101-1 FL SmartLine element with a dual wok burner

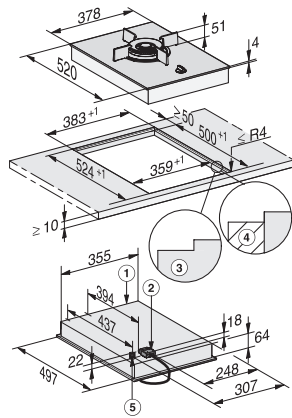

CS7101FL, CS7101-1FL flush (installation drawing)

1) Front, 2) Mains connection box with mains connection cable, L = 2000 mm, 3) Stepped cut-out, 4) Wooden frame 12 mm (supplied loose), 5) Gas connection R 1/2 - ISO 7-1 (DIN EN 10226)