

## DAS 2920 Slimline cooker hood with EasySwitch controls for convenient operation



- Classic design – stainless steel panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516495888 / Material number: 11878180 /  
Old Material Number: 28S2920SGB

<b>Construction type and design</b>	
Appliance colour	Stainless steel
<b>Construction type</b>	
Slimline cooker hood	•
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151, DUU 150
Active charcoal filter (order separately)	DKFS 31-R, DKFS 31-900 P
<b>User convenience</b>	
Electronic controls	•
Touch-on-glass controls	•
Booster levels	1
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	42.0
Energy efficiency class (A+++ – D)	A
Grease filtering efficiency class	A
Fluid dynamic efficiency class	A
Lighting efficiency class	A
<b>Cleaning and care</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
Number x W	1 x 3,2 W
Light intensity in lx	275 lx
Colour temperature in K	3500 Kelvin
<b>Fan</b>	
Dual-action blower	•
AC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m³/h) according to EN 61591	195
Air throughput in Level 2 (m³/h) according to EN 61591	295
Air throughput in Level 3 (m³/h) according to EN 61591	410
Air throughput in Booster level 1 (m³/h) according to EN 61591	555
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	69.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	33.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0

DAS 2920  
Slimline cooker hood  
with EasySwitch controls for convenient operation



EAN: 4002516495888 / Material number: 11878180 /  
Old Material Number: 28S2920SGB

Sound pressure in Level 3 (dB(A) re 20 µPa) according to  
EN 60704-2-13 47.0

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN  
60704-2-13 55.0

#### Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591 190

Air throughput in Level 2 (m³/h) according to EN 61591 290

Air throughput in Intensive level (m³/h) according to EN  
61591 550

Air throughput in Level 3 (m³/h) according to EN 61591 415

Sound power in Level 1 (dB(A) re 1 pW) according to EN  
60704-3 52.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN  
60704-3 60.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN  
60704-3 68.0

Sound power in Booster level (dB(A) re 1 pW) acc. to EN  
60704-3 75.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to  
EN 60704-2-13 46.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to  
EN 60704-2-13 54.0

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN  
60704-2-13 61.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to  
EN 60704-2-13 38.0

#### Safety

Safety switch-off •

#### Technical data

Canopy width in mm 896

Canopy height in mm 36

Canopy depth in mm 273

Net weight in kg 14.0

Length of supply lead in m 1.5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW  
total power, burner ≤ 4.5 kW) in mm 650

Number of phases 1

Total rated load in kW 0.20

Voltage in V 230

Fuse rating in A 10

Frequency in Hz 50

#### Installation notes

Extraction ducting connection at top •

Diameter of exhaust duct in mm 150


#### Accessories included

Non-return flap •

## DAS 2920

### Slimline cooker hood

with EasySwitch controls for convenient operation

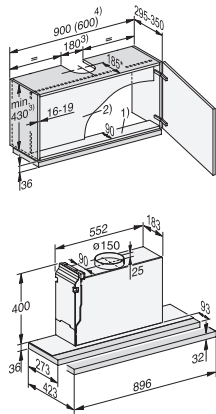

DAS2920, DAS2920EXTRA, DAS2922Living, DAS4920,  
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable., 3) Extraction, recirculation with conversion kit DUU 150., 4) Mounting is also possible in a 600 mm wide cabinet., \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly., , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).