


DAS 4640  
Slimline cooker hood  
for installation in narrow wall units with EasySwitch controls



- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 60 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

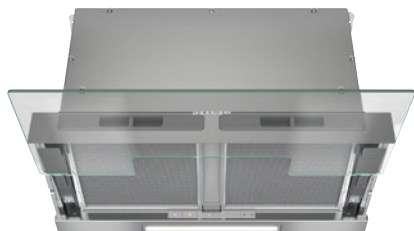


EAN: 4002516496298 / Material number: 11878230 /  
Old Material Number: 28S4640TGB

<b>Construction type and design</b>	
Appliance colour	Transp. glass
<b>Construction type</b>	
Slimline cooker hood	•
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 31-P, DKF 31-R
<b>User convenience</b>	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	27.4
Energy efficiency class (A+++ – D)	A+
ECO motor	•
Grease filtering efficiency class	B
ECO motor (DC motor)	•
PowerManagement system	•
Fluid dynamic efficiency class	A
Lighting efficiency class	A
<b>Cleaning and care</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
<b>Lighting</b>	
Number x W	1 x 3 W
Light intensity in lx	300 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
<b>Fan</b>	
Dual-action blower	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m³/h) according to EN 61591	180
Air throughput in Level 2 (m³/h) according to EN 61591	270
Air throughput in Level 3 (m³/h) according to EN 61591	380
Air throughput in Booster level 1 (m³/h) according to EN 61591	600
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	37.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	45.0

DAS 4640

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls

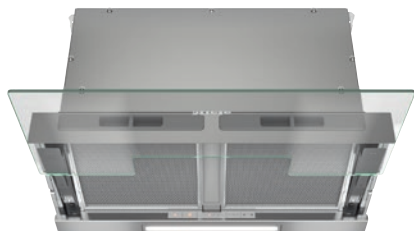

EAN: 4002516496298 / Material number: 11878230 /

Old Material Number: 28S4640TGB

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	64.0
---	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	23.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	50.0
--	------

#### Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	160
--	-----

Air throughput in Level 2 (m³/h) according to EN 61591	260
--	-----

Air throughput in Intensive level (m³/h) according to EN 61591	580
--	-----

Air throughput in Level 3 (m³/h) according to EN 61591	405
--	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
---	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
--	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	27.0
--	------

#### Safety

Safety switch-off	•
-------------------	---

Single-ply safety glass (ESG)	•
-------------------------------	---

#### Technical data

Canopy width in mm	561
--------------------	-----

Canopy height in mm	68
---------------------	----

Canopy depth in mm	307
--------------------	-----

Net weight in kg	12.0
------------------	------

Length of supply lead in m	1.5
----------------------------	-----

Standard plug fitted	•
----------------------	---

Minimum height above electric hobs in mm	450
--	-----

Number of phases	1
------------------	---

Total rated load in kW	0.08
------------------------	------

Voltage in V	230
--------------	-----


Fuse rating in A	10
------------------	----

Frequency in Hz	50
-----------------	----

DAS 4640

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls

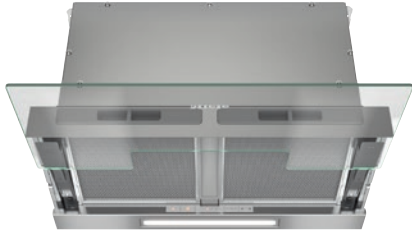

EAN: 4002516496298 / Material number: 11878230 /  
Old Material Number: 28S4640TGB

#### Installation notes

Extraction ducting connection at top	•
Extraction ducting connection at rear	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•


#### Accessories included

Non-return flap	•
-----------------	---

DAS 4640

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls

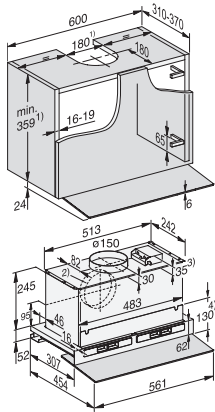

DAS4640, Installation drawings

- 1) Extraction, recirculation with conversion kit DUU 150.,  
 2) Alternative ducting connection to the rear., 3)  
 Accessory DSM module., 4) The wall unit can be fitted  
 with a partition after installation. The slots for the grease  
 filters and, in recirculation mode, for the odor filters  
 must remain accessible., , The height of the wall unit  
 and the cut-out dimensions must take into account  
 any accessories fitted (e.g. silencer, recirculation hood  
 conversion kit, DSM module)