

DAS 4940

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls



- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter



EAN: 4002516496366 / Material number: 11878240 /
Old Material Number: 28S4940TGB

Construction type and design	
Appliance colour	Transp. glass
Construction type	
Slimline cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 31-P, DKF 31-R
User convenience	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	24.8
Energy efficiency class (A+++ – D)	A++
ECO motor	•
Grease filtering efficiency class	B
ECO motor (DC motor)	•
PowerManagement system	•
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 3 W
Light intensity in lx	285 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m³/h) according to EN 61591	200
Air throughput in Level 2 (m³/h) according to EN 61591	290
Air throughput in Level 3 (m³/h) according to EN 61591	400
Air throughput in Booster level 1 (m³/h) according to EN 61591	625
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	36.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44.0

DAS 4940

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls



EAN: 4002516496366 / Material number: 11878240 /


Old Material Number: 28S4940TGB

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	51.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	62.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	22.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	48.0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	175
Air throughput in Level 2 (m³/h) according to EN 61591	270
Air throughput in Intensive level (m³/h) according to EN 61591	610
Air throughput in Level 3 (m³/h) according to EN 61591	425
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	41.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	50.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	36.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	28.0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	861
Canopy height in mm	68
Canopy depth in mm	307
Net weight in kg	15.0
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Number of phases	1
Total rated load in kW	0.08
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50

DAS 4940

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls

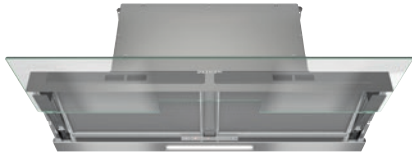

EAN: 4002516496366 / Material number: 11878240 /
Old Material Number: 28S4940TGB

Installation notes

Extraction ducting connection at top	•
Extraction ducting connection at rear	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Fitting template	•



Accessories included

Non-return flap	•
-----------------	---

DAS 4940

Slimline cooker hood

for installation in narrow wall units with EasySwitch controls



DAS4940, Installation drawings

1) Extraction, recirculation with conversion kit DUU 150.,
 2) Alternative ducting connection to the rear., 3)
 Accessory DSM module., 4) The wall unit can be fitted
 with a partition after installation. The slots for the grease
 filters and, in recirculation mode, for the odor filters must
 remain accessible., The height of the wall unit and the cut-
 out dimensions must take into account any accessories
 fitted (e.g. silencer, recirculation hood conversion kit, DSM
 module)