

DGC 7440 HC Pro

Compact combination steam oven

for steam cooking, baking, roasting with networking + HydroClean.



- Large clear text display with sensor controls – DirectSensor
- Perfect results – DualSteam technology
- Crispy outside, succulent inside – combination cooking
- Convenient operation – water container behind automatic panel
- Easy cleaning – HydroClean and stainless steel oven compartment



EAN: 4002516626138 / Material number: 12101250 /
Old Material Number: 23744048GB

| Construction type and design | |
|--|-----------------------------|
| Steam combination oven | • |
| PureLine | • |
| Appliance colour | Stainless steel/Clean Steel |
| Convenience features | |
| Rapid heat-up | • |
| Pre-heating | • |
| External steam generation | • |
| Oxygen sensor | • |
| Individual humidity settings in combination cooking | • |
| Menu cooking without transfer of taste | • |
| Prepare plated meals with "Mix & Match" | • |
| Automatic programmes with ability to make individual adjustments | • |
| Keeping warm | • |
| Crisp function | • |
| Operating modes | |
| Fan plus | • |
| Conventional heat | • |
| Steam cooking | • |
| Combination cooking | • |
| Combination cooking with Fan plus | • |
| Combination cooking with Conventional heat | • |
| Combination cooking with grill | • |
| Sous-vide | • |
| Intensive bake | • |
| Fan grill | • |
| Grill | • |
| Economy grill | • |
| Top heat | • |
| Bottom heat | • |
| Cake plus | • |
| Eco fan heat | • |
| Eco steam cooking | • |
| Defrost | • |
| Roast with moisture | • |
| Reheat | • |
| Plate warming | • |
| Automatic programmes | • |
| Country-specific automatic programmes | • |
| Special applications | • |
| User convenience | |
| Networking with Miele@home | • |
| Display | DirectSensor |
| SoftOpen | • |
| SoftClose | • |
| MultiLingua | • |
| Motorised lift-up control panel with SoftClose | • |

DGC 7440 HC Pro

Compact combination steam oven

for steam cooking, baking, roasting with networking + HydroClean.



EAN: 4002516626138 / Material number: 12101250 /

Old Material Number: 23744048GB

| | |
|--|------|
| Quantity-independent cooking | • |
| Steam cooking on up to 3 levels at the same time | • |
| Automatic menu cooking | • |
| Steam reduction before end of programme | • |
| Time of day display | • |
| Date display | • |
| Minute minder | • |
| Programmable start of cooking duration | • |
| Programmable end of cooking duration | • |
| Programmable cooking duration | • |
| Actual temperature display | • |
| Target temperature display | • |
| Buzzer when desired temperature is reached | • |
| Recommended temperature | • |
| User programmes | • |
| Sabbath programme | • |
| Individual settings | • |
| Efficiency and sustainability | |
| Energy efficiency class (A+++ – D) | A+ |
| Power rating in off mode in W | 0.3 |
| Power rating in standby mode in W | 0.8 |
| Power rating in networked standby in W | 2.0 |
| Time until automatic switch to standby in min | 20 |
| Time until automatic switch to off mode in min | 20 |
| Time until automatic switch to networked standby in min | 20 |
| Cleaning and care | |
| Stainless steel/CleanSteel finish | • |
| Stainless-steel oven compartment with linen structure | • |
| Hinged grill element | • |
| External steam generator | • |
| HydroClean | • |
| Soak programme | • |
| Rinse programme | • |
| Oven compartment drying programme | • |
| Quick-release side racks | • |
| Removable stainless-steel side racks | • |
| Automatic descaling | • |
| CleanGlass door | • |
| Steam techn./water supply | |
| DualSteam | • |
| Steam generator power in kW | 3.30 |
| Fresh water container volume in l | 1.4 |
| Fresh water container behind motorised control panel | • |
| Condensate container behind motorised lift-up control panel with SoftClose | • |
| Drain filter | • |
| Safety | |
| Appliance cooling system and touch-cool front | • |
| Safety switch-off | • |

DGC 7440 HC Pro

Compact combination steam oven

for steam cooking, baking, roasting with networking + HydroClean.



EAN: 4002516626138 / Material number: 12101250 /

Old Material Number: 23744048GB

| | |
|-----------------------|---|
| System lock | • |
| Vapour cooling system | • |
| Sensor lock | • |

| Technical data | |
|---|-----------------|
| Oven compartment volume in l | 47 |
| No. of shelf levels | 3 |
| Appliance dimensions (W x H x D) in mm | 595 x 456 x 569 |
| Numbered shelf levels | • |
| Door hinge | Bottom |
| Oven light | BrilliantLight |
| Oven temperature regulation min. in °C | 30 |
| Oven temperature regulation max. in °C | 230 |
| Electronic steam oven temperature regulation min. in °C | 40 |
| Electronic steam oven temperature regulation max. in °C | 100 |
| Niche width min. in mm | 560 |
| Niche width max. in mm | 568 |
| Niche height min. in mm | 450 |
| Niche height max. in mm | 452 |
| Niche depth in mm | 550 |
| Appliance width in mm | 595 |
| Appliance height in mm | 455.5 |
| Appliance depth in mm | 568.5 |
| Weight in kg | 40.2 |
| Total rated load in kW | 3.40 |
| Voltage in V | 230 |
| Frequency in Hz | 50 |
| Fuse rating in A | 16 |
| Number of phases | 1 |
| Mains cable with plug | • |
| Length of supply lead in m | 2 |
| Replacing lamps | Service |

| Accessories included | |
|--|---|
| Universal tray with PerfectClean HUBB 71 | 1 |
| Baking and roasting rack with PerfectClean HBRR 71 | 1 |
| Removable side runners (pair) | 1 |
| Perforated stainless-steel cooking containers | 1 |
| Solid stainless steel cooking containers | 1 |
| HydroClean cleaning agent | 1 |
| Descaling tablets | 2 |

| Available display languages | |
|---|---|
| Available display languages via MultiLingua | bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederlands, norsk, polski, português, русский, română, slovenčina, slovenščina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικά, ? ? ? ? ? ? ? ? , ? ? ? , ? ? ? ? , ? ? ? ? ? , ? ? ? ? |


DGC 7440 HC Pro

Compact combination steam oven
for steam cooking, baking, roasting with networking + HydroClean.

DGC 7440 HC Pro


Compact combination steam oven

for steam cooking, baking, roasting with networking + HydroClean.

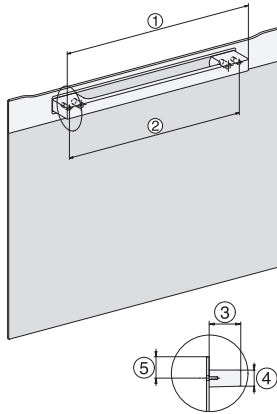


H7000 handle, installation drawing


1) 400 mm, 2) 360 mm, 3) 47 mm, 4) 24 mm, 5) 32.5 mm

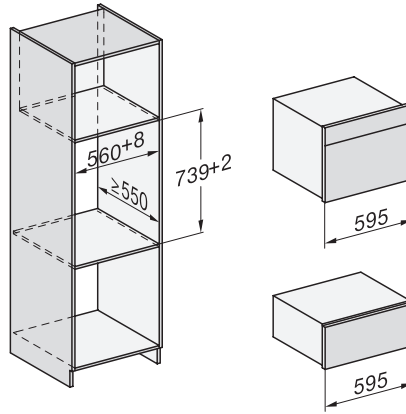


Installation DG, DGM, DGC XL, ESW7x20 installation drawings

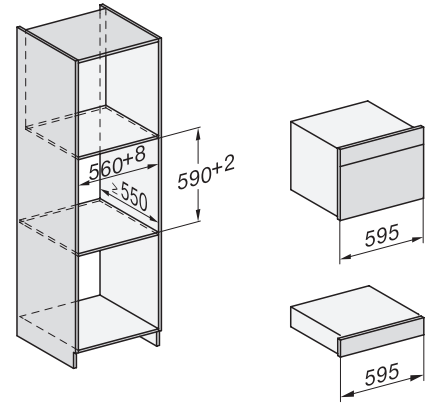


Installation DG, DGM, DGC XL, ESW7x10, EVS7010, installation drawings

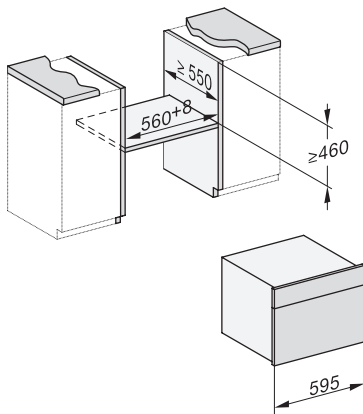


built-in DG, DGM, DGC XL build-under, installation drawing

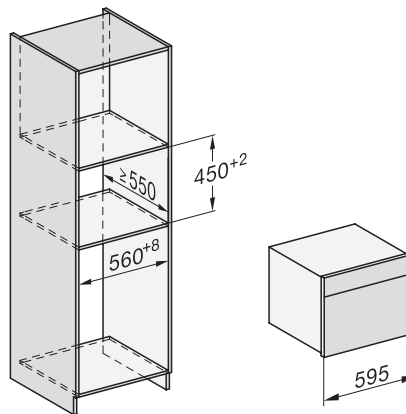


DGC7x4x built-in tall cabinet, installation drawing

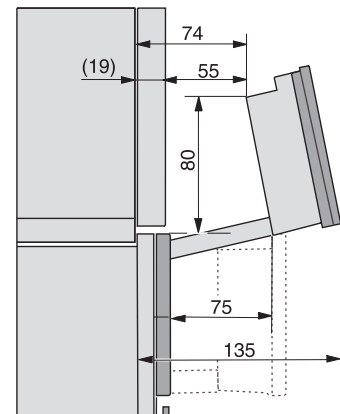


DGC7x4x swivel range of the aperture, installation drawings

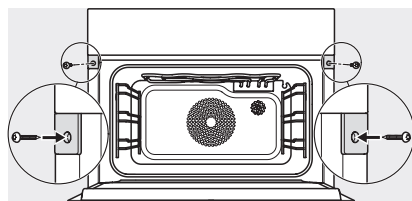

screw joint DGC XL, installation drawing

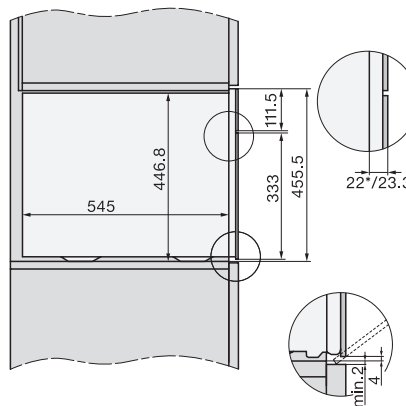

side view DGC XL, installation drawing, GB, AU
22 mm glass, 23,3 mm stainless steel

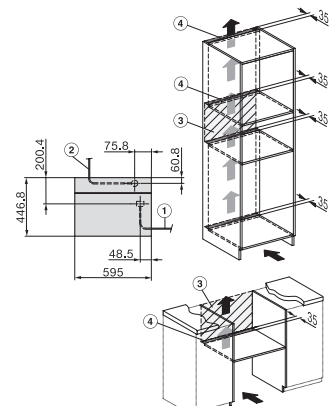

installation DGC XL, installation drawing, GB, AU

1) Front view, 2) Mains connection cable, L=2,000 mm, 3) ventilation cut-out min. 180 cm², 4) no connection in this area