

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



- Timeless design – stainless steel canopy 598 mm wide
- Powerful – 640 m³/h in Booster level
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminium metal grease filter
- Suitable for every home – for extraction or recirculation



EAN: 4002516657040 / Material number: 12178460 /
Old Material Number: 28W1620EGB

Construction type and design	
Appliance colour	Stainless steel
Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKFS 36-P
User convenience	
Electronic controls	•
Booster levels	1
Efficiency and sustainability	
Annual energy consumption in kWh/year	49.9
Energy efficiency class (A+++ – D)	A
Grease filtering efficiency class	B
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Filter system	
Number of dishwasher-safe metal grease filters	2
Lighting	
Number x W	1 x 3,2 W
Light intensity in lx	390 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	250
Air throughput in Level 2 (m ³ /h) according to EN 61591	395
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	235
Air throughput in Level 2 (m ³ /h) according to EN 61591	390
Air throughput in Intensive level (m ³ /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



EAN: 4002516657040 / Material number: 12178460 /
Old Material Number: 28W1620EGB

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 64.0

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3 74.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 50.0

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 60.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 39.0

Technical data

Overall hood height for extraction mode and external in mm 673–993

Overall height for recirculation mode cooker hoods in mm 803–1123

Canopy width in mm 598

Overall height for vented and external in in. (mm) 673

Overall height for extraction mode and external mode cooker hoods in mm 993

Canopy height in mm 50

Overall height for recirculation in in. (mm) 803

Canopy depth in mm 500

Overall height for recirculation mode cooker hoods in mm 1123

Net weight in kg 13.4

Length of supply lead in m 1.4

Standard plug fitted •

Minimum height above electric hobs in mm 450

Number of phases 1

Total rated load in kW 0.24

Voltage in V 230

Fuse rating in A 10

Frequency in Hz 50

Installation notes

Extraction ducting connection at top •

Extraction ducting connection at rear •

Extraction connection at top and rear •


Diameter of exhaust duct in mm 150

Telescopic chimney •

Accessories included

Non-return flap •

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation

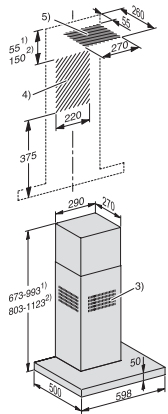

DAW1620, DAW1622W Living, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)