

DAD 4841 Black Levantar

Downdraft extractor

in an elegant obsidian black design and with intuitive SmartControl operation



- 916 mm wide – the perfect combination with panorama hobs
- Easy recirculation mode installation with plug&play accessory set
- Motorised retractable deflector plate – Hood in Motion
- Unique user convenience – Con@ctivity
- Efficient filtration- 10-ply stainless-steel grease filter



EAN: 4002516761679 / Material number: 12440700 /
Old Material Number: 28D4841MGB

Construction type and design	
Appliance colour	Obsidian black
Construction type	
Downdraft extractor	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUP 150, DUU 600
Active charcoal filter (order separately)	DKF 30-P, DKF 30-R
Design	
Edge extraction	•
User convenience	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
Power levels (number without Booster level)	3
Booster levels	2
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Motor-operated cooker hoods	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	41.6
Energy efficiency class (A+++ – D)	A
ECO motor	•
Grease filtering efficiency class	B
ECO motor (DC motor)	•
PowerManagement system	•
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
Number x W	1 x 11,2 W
Light intensity in lx	400 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Booster level 2 (m³/h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	44.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	57.0

DAD 4841 Black Levantar

Downdraft extractor

in an elegant obsidian black design and with intuitive SmartControl operation



EAN: 4002516761679 / Material number: 12440700 /

Old Material Number: 28D4841MGB

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
---	------

Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	72.0
---	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30.0
--	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	43.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	56.0
--	------

Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	58.0
---	------

Recirculation

Air throughput in Booster level 2 (m³/h) according to EN 61591	555
--	-----

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	50.0
--	------

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64.0
--	------

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	69.0
--	------

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	75.0
---	------

Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	76.0
---	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	50.0
--	------

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	56.0
--	------

Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	61.0
--	------

Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	62.0
---	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	37.0
--	------

Safety

Safety switch-off	•
-------------------	---

Single-ply safety glass (ESG)	•
-------------------------------	---

Technical data

Standard plug fitted	•
----------------------	---

Number of phases	1
------------------	---

Total rated load in kW	0.25
------------------------	------

Voltage in V	230
--------------	-----

Fuse rating in A	10
------------------	----

Frequency in Hz	50
-----------------	----

Installation notes




Bottom exhaust duct	•
---------------------	---

Optimum combination with hob subject to availability	KM 7689 FL; KM 7684 FL
--	------------------------

DAD 4841 Black Levantar


Downdraft extractor

in an elegant obsidian black design and with intuitive SmartControl operation

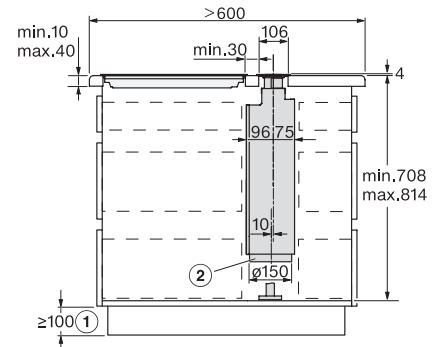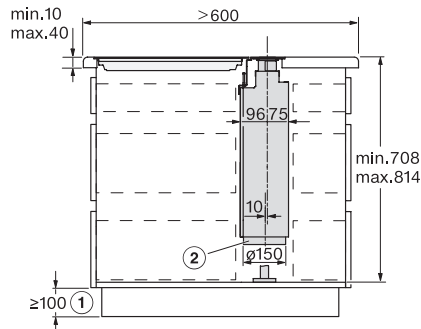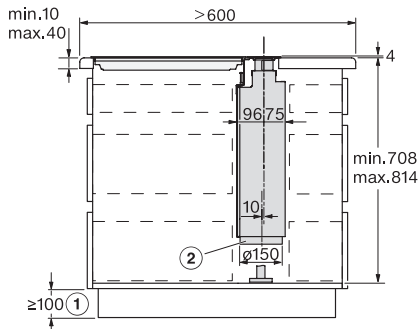


DAD4840, DAD4940, DAD4841, DAD4941 - surface mounted, AP > 600 mm – side view – Installation drawings

2 Only required if flat ducts are laid under the cabinets or the DUU 600 recirculation box is used., 2 Exhaust air connection Ø 150 millimetres.

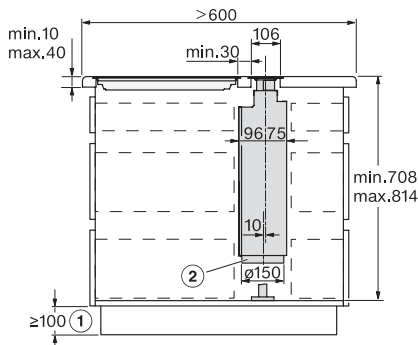

DAD4840, DAD4940, DAD4841, DAD4941 - flush – side view – Installation drawings

2 Only required if flat ducts are laid under the cabinets or the DUU 600 recirculation box is used., 2 Exhaust air connection Ø 150 millimetres.

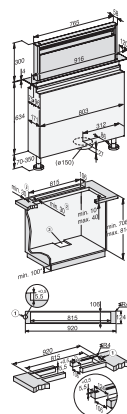


DAD4841, Installation drawings

1. Stepped cutout for flush-fit installation in stone worktops (granite, marble)., 2. Ensure that materials are sufficiently stable., 3. Cut-out off-centre., Exhaust duct Ø 150 mm., * Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used.

DAD4840, DAD4940, DAD4841, DAD4941 - surface mounted, AP > 600 mm – side view – Installation drawings

2 Only required if flat ducts are laid under the cabinets or the DUU 600 recirculation box is used., 2 Exhaust air connection Ø 150 millimetres.

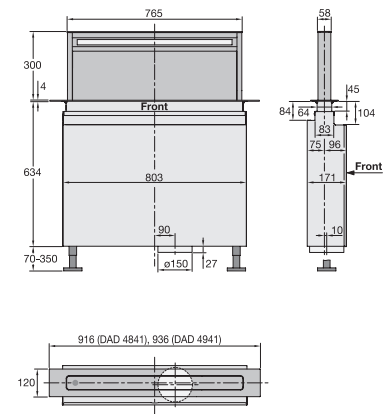




DAD4841, DAD4941, Installation drawings

Side-by-side installation of the downdraft hood and the cooktop in a common cutout., Example: combination with KM 7684 FL or KM 7689 FL., Surface mounted installation, 1) Cut-out for exhaust air line in cabinet base., 2) Ensure sufficient stability of the worktop., , Exhaust air connection ø150 mm.

DAD 4841 Black Levantar

Downdraft extractor

in an elegant obsidian black design and with intuitive SmartControl operation

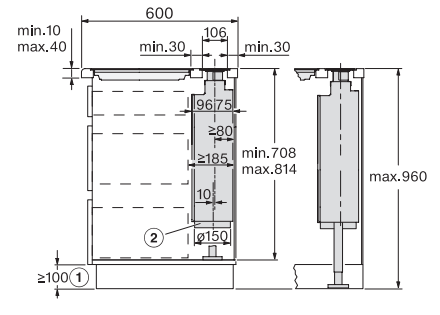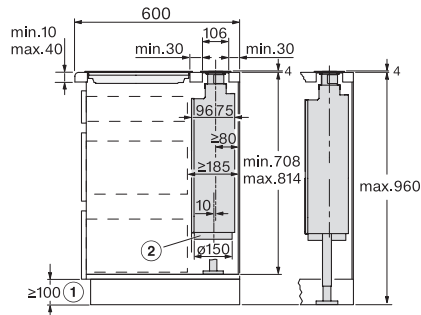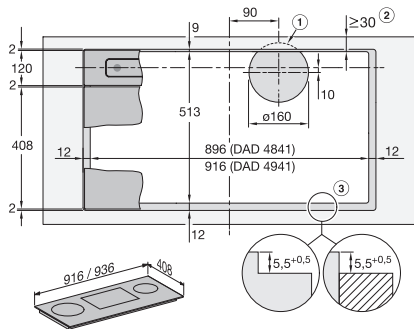

DAD4841, DAD4941, flush, Installation drawings



Side-by-side installation of the downdraft hood and the cooktop in a common cutout, Example: combination with KM 7697 FL or KM 7594 FL, Flush installation, 1) Cut-out for exhaust air duct in the cabinet base, 2) Ensure sufficient stability of the worktop, 3) Step milling for flush mounting in a worktop. Note the, the different milling widths for the hob and the downdraft. Instead of a step milling, a 5.5 mm downwardly offset wooden strip can be installed (not included in the scope of delivery), Exhaust air connection \varnothing 150 mm.

DAD4841, DAD4941, overlying – AP600 mm, Side view, Installation drawings

2 Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used, 2 Exhaust duct \varnothing 150 mm.

DAD4841, DAD4941, flush – AP600 mm, Side view, Installation drawings

2 Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used, 2 Exhaust duct \varnothing 150 mm.

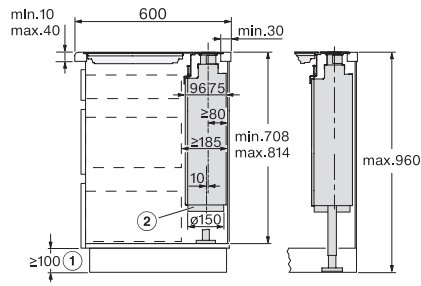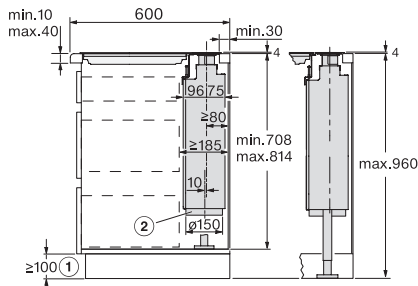

DAD4841, DAD4941, overlying – AP600 mm, common cutout, Installation drawings

2 Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used, 2 Exhaust duct \varnothing 150 mm.

DAD4841, DAD4941, flush – AP600 mm, common cutout, Installation drawings

2 Only required when flat ducting is laid under cabinets or the DUU 600 recirculation box is used, 2 Exhaust duct \varnothing 150 mm.