

DAC 2940 Stella Ceiling extractor in compact design in 880 mm width



- Easy recirculation mode installation with plug&play
- Convenient operation – with Con@ctivity and remote control included
- Energy-efficient and quiet – powerful ECO motor
- Efficient filtration- 10-ply stainless-steel grease filter
- Panel



EAN: 4002516802853 / Material number: 12549760 /
Old Material Number: 28C2940SGB

Construction type and design	
Appliance colour	Stainless steel
Construction type	
Ceiling extractor	•
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 35-P
Design	
Edge extraction	•
User convenience	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Touch-on-glass controls	•
ON/OFF switch	•
Power levels (number without Booster level)	3
Booster levels	1
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	31.7
Energy efficiency class (A+++ – D)	A++
ECO motor	•
Grease filtering efficiency class	C
ECO motor (DC motor)	•
PowerManagement system	•
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	4
Lighting	
Number x W	2 x 7,2 W
Light intensity in lx	525 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m³/h) according to EN 61591	235
Air throughput in Level 2 (m³/h) according to EN 61591	400
Air throughput in Level 3 (m³/h) according to EN 61591	510
Air throughput in Booster level 1 (m³/h) according to EN 61591	685
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43.0

DAC 2940 Stella
Ceiling extractor
in compact design in 880 mm width



EAN: 4002516802853 / Material number: 12549760 /
Old Material Number: 28C2940SGB

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	68.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	28.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	45.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	53.0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	165
Air throughput in Level 2 (m³/h) according to EN 61591	325
Air throughput in Intensive level (m³/h) according to EN 61591	525
Air throughput in Level 3 (m³/h) according to EN 61591	425
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	46.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	59.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	65.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	44.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	50.0
Sound power in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	54.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	31.0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	880
Overall height for vented and external in in. (mm)	196
Overall height for extraction mode and external mode cooker hoods in mm	196
Canopy height in mm	196
Overall height for recirculation in in. (mm)	196
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	196
Net weight in kg	16.7
Length of supply lead in m	1.4
Standard plug fitted	•
Minimum height above electric hobs in mm	450

DAC 2940 Stella
Ceiling extractor
in compact design in 880 mm width



EAN: 4002516802853 / Material number: 12549760 /
Old Material Number: 28C2940SGB

Minimum safety distance above gas hobs (max. 12.6 kW
total power, burner \leq 4.5 kW) in mm 650

Number of phases	1
Total rated load in kW	0.17
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50


Installation notes

Extraction ducting connection on side	•
Diameter of exhaust duct in mm	150

Accessories included

Adapter to reduce ducting diameter from 150 mm to 125 mm Ø	•
Remote control	•
Non-return flap	•

DAC 2940 Stella Ceiling extractor in compact design in 880 mm width

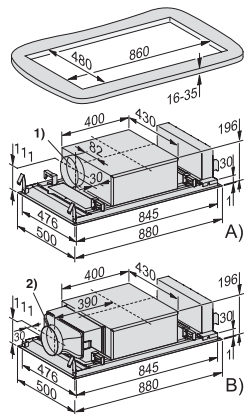

DAC2940, DAC4940, DAC4943 EXTA Installation drawings

A) Exhaust air mode, B) Recirculation mode with integrated odour filter, 1) Exhaust air connection \varnothing 150 mm, The connection piece is on the left-hand side ex works., -The housing can be rotated by 90 degrees for exhaust air routing to the front or rear. To allow the housing to be rotated, there must be a free space of 100 mm in the ceiling in front of and behind the ceiling cut-out., -For an exhaust air duct to the right, the extractor bonnet must be installed rotated by 180 degrees., 2) Spigot \varnothing 150 mm as air outlet in Plug&Play mode or for connecting an air duct in ducted recirculation mode. The connection piece is on the left-hand side ex works., -It is not possible to convert the spigot to the front or rear., -For an exhaust air duct to the right, the cooker bonnet must be installed rotated by 180 degrees.,